


PROVEN PERFORMANCE, UNMATCHED DURABILITY.

Southwest Oilfield Products offers a wide range of gaskets and packing materials for use in drilling pumps.

Gaskets are made of various elastomers and rubbers depending on the application. High temperature elastomers are now available that are designed to excel in extreme drilling conditions.

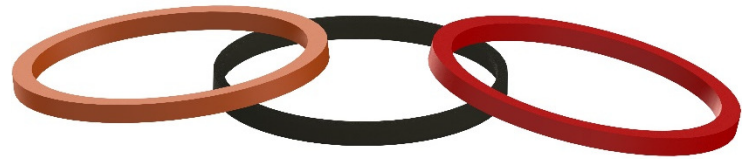

Key Features Include:

- Based on design, used as valve cover gaskets, liner gaskets, module gaskets, etc.
- Excellent sealing characteristics.
- Hi-temperature gaskets have a maximum working temperature of up to 300°F.
- High resistance to chemical breakdown, teardown, tearing, and abrasion.

APPLICATION DATA FOR SOUTHWEST SEALS AND GASKETS

	HOMOGENEOUS RUBBER	FABRIC REINFORCED RUBBER	POLYURETHANE	HI TEMP POLYURETHANE
ABRASION RESISTANCE	GOOD	GOOD	EXCELLENT	VERY GOOD
TEAR RESISTANCE	GOOD	GOOD	EXCELLENT	VERY GOOD
RESISTANCE TO OIL	VERY GOOD	VERY GOOD	VERY GOOD	VERY GOOD
TEMPERATURE RESISTANCE	EXCELLENT	VERY GOOD	GOOD	VERY GOOD
EXTRUSION RESISTANCE	GOOD	EXCELLENT	VERY GOOD	VERY GOOD
HIGH TEMPERATURE SERVICE	EXCELLENT	VERY GOOD	POOR	VERY GOOD
WEAR TO ASSOCIATED COMPONENTS	EXCELLENT	GOOD	EXCELLENT	EXCELLENT
USED IN WORN PUMP	POOR	GOOD	POOR	POOR
TEMPERATURE LIMIT	250 DEGREES F.	225 DEGREES F.	160-180 DEGREES F.	230-300 DEGREES F.

EXCELLENT
VERY GOOD
GOOD
POOR